


# 20K Lift Check Valve

20SN  
U.B.

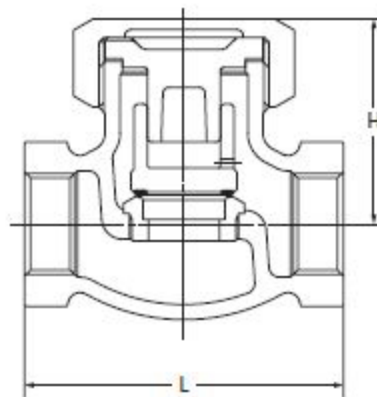

E-E dimension : KITZ Std.  
End threads : JIS B 0203

120°C Static water..... 2.75MPa  
220°C Steam, air, gas, oil..... 2.45MPa  
300°C Steam, air, gas, oil..... 2.26MPa  
350°C Steam, air, gas, oil..... 1.96MPa

● Use for lubricating or hydraulic oil is acceptable.

## Materials

Parts	JIS material
Body	FCD-S
Bonnet	SCS 1
Disc	SCS 13A+HF*
Bonnet ring	FCD-S
Gasket	Asbestos-free
Body seat ring	SCS 13A+HF*

\* Hard-faced with Co-Cr-W alloy

## Dimensions

mm

Size	mm	15	20	25	32	40	50
	inch	1/2	3/4	1	1 1/4	1 1/2	2
L		78	91	105	122	135	160
H		56	60	68	80	85	99