



Born to save energy

GLOBE VALVE

GLV-1

Features

Wetted parts of GLV-1 are made of bronze or dezincification resistant brass. Widely applicable for steam, air, water or oil application.

Specifications

| | | |
|---------------------|--------|-------------------------------------|
| Model | | GLV-1 |
| Application | | Steam, air, cold and hot water, oil |
| Maximum pressure | | 1.0MPa |
| Maximum temperature | | 185°C |
| Material | Body | Bronze |
| | Bonnet | Brass or bronze |
| | Valve | Brass or bronze |
| Connection | | JIS Rc |



*Valve is closed at the time of shipment from factory.

BALL VALVE


BLV-1

Features

Body of GLV-1 is made of bronze and ball is made of chrome-plated brass or stainless steel. Widely applicable for steam, air, water or oil application.

Specifications

| | | |
|------------------|------|---|
| Model | | BLV-1 |
| Application | | Steam, air, cold and hot water, oil |
| Maximum pressure | | Saturated steam: 1.0MPa Water, oil, air or other non-dangerous fluid at 40°C or lower: 4.12MPa |
| Material | Body | Bronze |
| | Ball | Cr plated brass or stainless steel |
| | Stem | Brass |
| Connection | | JIS Rc |

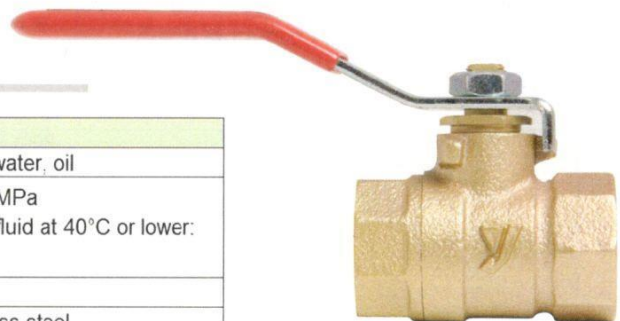

*Valve (ball) is closed at the time of shipment from factory.

*There is no restriction on flow direction.